



130 WATT POWER FACTOR CORRECTED SUPPLIES

DESCRIPTION

The PFC130 series incorporates creative high efficiency circuitry, high power density (6.94 Watts/in³) and active Power Factor Correction (PFC) to meet the requirements of data networking, computing and telecommunication systems. Some models with one or two outputs adjustable between 5V and 24V intend to suit more applications.

PFC130 SERIES (MULTIPLE OUTPUT)



FEATURES

- EN61000-3-2 class A and D compliant
- Power factor 0.98 typical
- Very compact size, 3"×5"×1.2"
- Overvoltage protection
- Short circuit protection
- Remote sense on 3.3V output
- Power Good/Power Fail Detect Signal
- Up to five DC outputs
- All outputs well regulated
- Compliant with RoHS requirements

New!!

Safety Standard Approvals :



UL 60950 3rd, CSA C22.2 NO. 60950 3rd
File No. E137410



TÜV EN60950-1

INPUT SPECIFICATIONS

Input voltage : 90 to 264VAC
 Input frequency : 47 to 63Hz
 Input current : 2.1A (rms) max. for 115VAC
 1.1A (rms) max. for 230VAC
 Earth leakage current: 0.3mA max. @ 115VAC, 60Hz
 (Touch current) 0.6mA max. @ 230VAC, 50Hz

ENVIRONMENTAL SPECIFICATIONS

Operating temperature : -10°C to +60°C
 Storage temperature : -40°C to +85°C
 Relative humidity : 5% to 95% non-condensing
 Derating : Derate from 100% at +40°C
 linearly to 50% at +60°C
 Cooling : 10 CFM total forced air
 from two 40mm diameter
 fans or the like is required
 and provided by user.

OUTPUT SPECIFICATIONS

Output voltage/current : See Rating Chart
 Ripple and noise : 65mV peak to peak on V1, 1%
 peak to peak on other outputs
 Overvoltage protection : Provided on V0 & V1; set at
 112-132% of its nominal
 output voltage
 Overcurrent protection : All outputs protected to short
 circuit conditions
 Temperature coefficient : All outputs ±0.04/°C maximum
 Transient response : Maximum excursion of 4%
 or better on all models,
 recovering to 1% of final
 value within 500us after
 a 25% step load change
 PG/PFD signal : TTL logic high for normal
 operation and TTL logic low
 upon loss of input power.
 This signal appears at least
 10ms prior to master output
 dropping 5% below its
 nominal value. This signal
 also provides a minimum
 delay of 100ms after master
 output is within regulation

GENERAL SPECIFICATIONS

Switching frequency : 100KHz ±10KHz
 Power factor : 0.98 typical
 Efficiency : 75% typical
 Hold-up time : 15 msec minimum at 115VAC
 Line regulation : ±0.5% maximum at full load
 Inrush current : 35 amps @ 115VAC or 70 amps
 @ 230VAC at 25°C cold start
 Withstand voltage : 3000VAC from input to output
 1500VAC from input to ground
 500VAC from output to ground
 200,000 hours minimum
 MTBF :
 EMC Performance (EN55024)
 EN55022: Class B conducted, Class A radiated
 FCC Part 15 Class B conducted, Class A radiated
 VCCI: Class B conducted, Class A radiated
 EN61000-3-2: Harmonic distortion, Class A and D
 EN61000-3-3: Line flicker
 EN61000-4-2: ESD, ± 8KV air and ± 4KV contact
 EN61000-4-3: Radiated immunity, 3V/m
 EN61000-4-4: Fast transient/burst, ± 1KV
 EN61000-4-5: Surge, ± 1KV diff., ± 2KV com.
 EN61000-4-6: Conducted immunity, 3Vrms
 EN61000-4-8: Magnetic field immunity, 1A/m
 EN61000-4-11: Voltage dips, 30% reduction for 500ms
 and >95% reduction for 10ms

1-7

PROTEK

UNIVERSAL INPUT-MULTIPLE OUTPUTS PFC130 SERIES


OUTPUT VOLTAGE/CURRENT RATING CHART

(1)(2) (5)(6) MODEL	V1(3) 5CFM 10CFM				V2 5CFM 10CFM				V3 (4) 5CFM 10CFM				V4 (4) 5CFM 10CFM				VO 5CFM 10CFM			
	Vnom.	I _{max.}	I _{max.}	Tol.	Vnom.	I _{max.}	I _{max.}	Tol.	Vnom.	I _{max.}	I _{max.}	Tol.	Vnom.	I _{max.}	I _{max.}	Tol.	Vnom.	I _{max.}	I _{max.}	Tol.
PFC130-23-3A	+5.1V	8A	12A	2%	(N/A)				(N/A)				(N/A)				+3.3V	8A	12A	2%
PFC130-23A	+5.1V	8A	12A	2%	+12V	3.25A	6A	3%	(N/A)				(N/A)				(N/A)			
PFC130-24A	+5.1V	8A	12A	2%	+15V	2.6A	4.8A	3%	(N/A)				(N/A)				(N/A)			
PFC130-25A	+5.1V	8A	12A	2%	+24V	1.63A	3A	3%	(N/A)				(N/A)				(N/A)			
PFC130-31A	+5.1V	8A	12A	2%	+12V	3.25A	6A	3%	+5V~+24V	0.5A	1A	2%	(N/A)				(N/A)			
PFC130-32A	+5.1V	8A	12A	2%	+15V	2.6A	4.8A	3%	+5V~+24V	0.5A	1A	2%	(N/A)				(N/A)			
PFC130-33A	+5.1V	8A	12A	2%	+24V	1.63A	3A	3%	+5V~+24V	0.5A	1A	2%	(N/A)				(N/A)			
PFC130-34A	+5.1V	8A	12A	2%	+12V	3.25A	6A	3%	(N/A)				-5V~-24V	0.5A	1A	2%	(N/A)			
PFC130-35A	+5.1V	8A	12A	2%	+15V	2.6A	4.8A	3%	(N/A)				-5V~-24V	0.5A	1A	2%	(N/A)			
PFC130-36A	+5.1V	8A	12A	2%	+24V	1.63A	3A	3%	(N/A)				-5V~-24V	0.5A	1A	2%	(N/A)			
PFC130-31-3A	+5.1V	8A	12A	2%	+12V	3.25A	6A	3%	(N/A)				(N/A)				+3.3V	8A	12A	2%
PFC130-33-3A	+5.1V	8A	12A	2%	+15V	2.6A	4.8A	3%	(N/A)				(N/A)				+3.3V	8A	12A	2%
PFC130-39-3A	+5.1V	8A	12A	2%	+24V	1.63A	3A	3%	(N/A)				(N/A)				+3.3V	8A	12A	2%
PFC130-41A	+5.1V	8A	12A	2%	+12V	3.25A	6A	3%	+5V~+24V	0.5A	1A	2%	-5V~-24V	0.5A	1A	2%	(N/A)			
PFC130-42A	+5.1V	8A	12A	2%	+15V	2.6A	4.8A	3%	+5V~+24V	0.5A	1A	2%	-5V~-24V	0.5A	1A	2%	(N/A)			
PFC130-43A	+5.1V	8A	12A	2%	+24V	1.63A	3A	3%	+5V~+24V	0.5A	1A	2%	-5V~-24V	0.5A	1A	2%	(N/A)			
PFC130-41-3A	+5.1V	8A	12A	2%	+12V	3.25A	6A	3%	+5V~+24V	0.5A	1A	2%	(N/A)				+3.3V	8A	12A	2%
PFC130-42-3A	+5.1V	8A	12A	2%	+15V	2.6A	4.8A	3%	+5V~+24V	0.5A	1A	2%	(N/A)				+3.3V	8A	12A	2%
PFC130-43-3A	+5.1V	8A	12A	2%	+24V	1.63A	3A	3%	+5V~+24V	0.5A	1A	2%	(N/A)				+3.3V	8A	12A	2%
PFC130-44-3A	+5.1V	8A	12A	2%	+12V	3.25A	6A	3%	(N/A)				-5V~-24V	0.5A	1A	2%	+3.3V	8A	12A	2%
PFC130-45-3A	+5.1V	8A	12A	2%	+15V	2.6A	4.8A	3%	(N/A)				-5V~-24V	0.5A	1A	2%	+3.3V	8A	12A	2%
PFC130-46-3A	+5.1V	8A	12A	2%	+24V	1.63A	3A	3%	(N/A)				-5V~-24V	0.5A	1A	2%	+3.3V	8A	12A	2%
PFC130-51-3A	+5.1V	8A	12A	2%	+12V	3.25A	6A	3%	+5V~+24V	0.5A	1A	2%	-5V~-24V	0.5A	1A	2%	+3.3V	8A	12A	2%
PFC130-52-3A	+5.1V	8A	12A	2%	+15V	2.6A	4.8A	3%	+5V~+24V	0.5A	1A	2%	-5V~-24V	0.5A	1A	2%	+3.3V	8A	12A	2%
PFC130-53-3A	+5.1V	8A	12A	2%	+24V	1.63A	3A	3%	+5V~+24V	0.5A	1A	2%	-5V~-24V	0.5A	1A	2%	+3.3V	8A	12A	2%

MEMO:

NOTES:


- The outputs of each model are from two independent channels. Channel #1 consists of the main output V1 and auxiliary output V0. Channel #2 consists of the main output V2 and auxiliary outputs V3 and V4. The maximum output power that may be drawn from each channel is 45W with 5 CFM forced-air cooling or 65W with 10 CFM forced-air cooling. The derating curve on right provides guidelines on application within the specified operating temperature range.
- "5 CFM I_{max.}" ("10 CFM I_{max.}") is the maximum current of individual output when 5 CFM (10 CFM) forced air is provided. Under a specific cooling condition, both the maximum output power stated in note #1 and the maximum current of individual output must not be exceeded.
- V1 needs a minimum current of 0.8A to support output V0 at its maximum rated load.
- The total output power of V3 and V4 should not exceed 30W. V3 is adjustable between +5V and +24V, and set at +12V as standard. V4 is adjustable between -5V and -24V, and set at -12V as standard. It is welcome to consult factory for the two outputs to be set at wanted voltages within the adjustable ranges.
- Ripple and noise measured peak to peak across a 20MHz bandwidth by using a 12 inch twisted pair terminated with a 10uF tantalum capacitor in parallel with a 0.1uF ceramic capacitor.
- "Tol." is output voltage tolerance which includes initial set-up error, thermal drift, line regulation, load regulation and cross regulation.

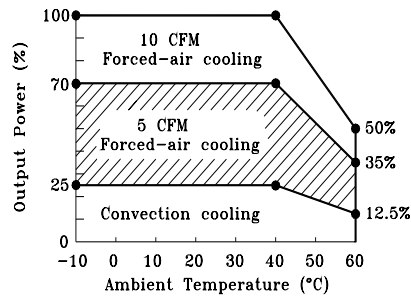

DERATING CURVE

UNIVERSAL INPUT-MULTIPLE OUTPUTS PFC130 SERIES

MECHANICAL SPECIFICATIONS

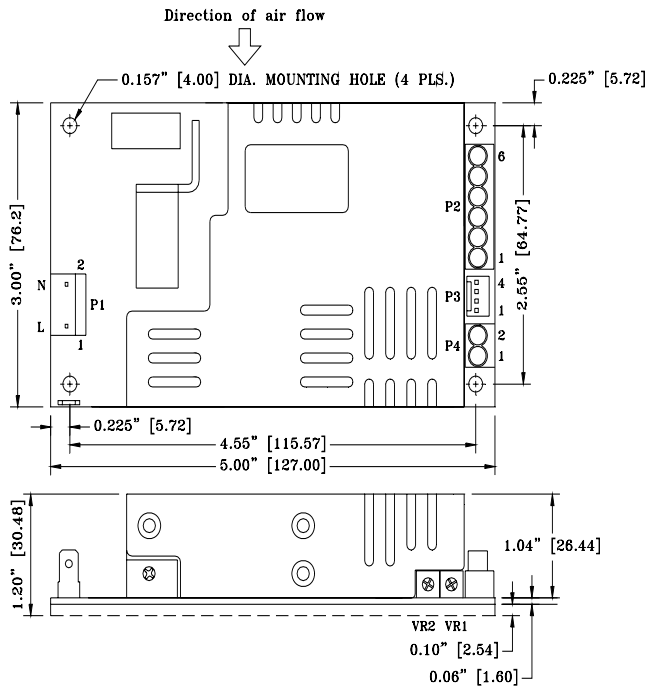

NOTES:

1. Dimensions shown in inch [mm]
2. Tolerance 0.02 [0.5] maximum
3. Connector P1 mates with Molex housing 09-50-3031 and Molex 2878 series crimp terminal.
4. Connectors P2 and P4 are suitable for AWG#18~AWG#12 electric wires.
5. Connector P3 mates with Molex housing 22-01-1043 and Molex 40445 series crimp terminal.
6. Weight: 0.43 kgs. (0.95 lbs.) approx.
7. Potentiometers for output voltage adjustments: VR1 for V1, VR2 for V0, VR3 for V3, VR4 for V4 (VR3 and VR4 being SMD type on trace side)

MEMO:

PIN CHART

MODEL	CONN PIN	P1		P2						P3				P4	
		1	2	1	2	3	4	5	6	1	2	3	4	1	2
PFC130-23-3A		AC LIVE	AC NEUTRAL	V1	COM. RET.	COM. RET.	N.C.	N.C.	N.C.	- SENSE (VO)	+ SENSE (VO)	PG/PFD Signal	COM. RET.	VO	COM. RET.
PFC130-23A PFC130-24A PFC130-25A									V2	N.C.	N.C.			VOID	
PFC130-31A PFC130-32A PFC130-33A							V3	N.C.		N.C.	N.C.	PG/PFD Signal	COM. RET.	VOID	
PFC130-34A PFC130-35A PFC130-36A		AC LIVE	AC NEUTRAL	V1	COM. RET.	COM. RET.		V4	V2						
PFC130-31-3A PFC130-33-3A PFC130-39-3A							N.C.	N.C.		- SENSE (VO)	+ SENSE (VO)			VO	COM. RET.
PFC130-41A PFC130-42A PFC130-43A							V3	V4		N.C.	FAN			VOID	
PFC130-41-3A PFC130-42-3A PFC130-43-3A		AC LIVE	AC NEUTRAL	V1	COM. RET.	COM. RET.		N.C.	V2	- SENSE (VO)	+ SENSE (VO)	PG/PFD Signal	COM. RET.	VO	COM. RET.
PFC130-44-3A PFC130-45-3A PFC130-46-3A							N.C.	V4							
PFC130-51-3A PFC130-52-3A PFC130-53-3A		AC LIVE	AC NEUTRAL	V1	COM. RET.	COM. RET.	V3	V4	V2	- SENSE (VO)	+ SENSE (VO)	PG/PFD Signal	COM. RET.	VO	COM. RET.